

LB50



MIKROKLIMA

PROBE SPECIFICATION

Minimum center: 1.27 mm
Current rating: 3A
Contact resistance: < 25mΩ

MATERIALS

Barrel: PhBz, Gold plated over Nickel
Spring: SUS wire
Plunger: Carbon steel, Gold plated over Nickel
Receptacle: BST, Gold plated
Terminal: Brass, Gold plated over Nickel


RECEPTACLE SPEC

LBR50-C: Crimp
LBR50-VC-6: Wire wrap
LBR50-SC: Solder cup
LBR50-W: wire

Mount hole: 0.95-1.0 mm

SPRING FORCE

L: 102g
S: 156g
H: 198g

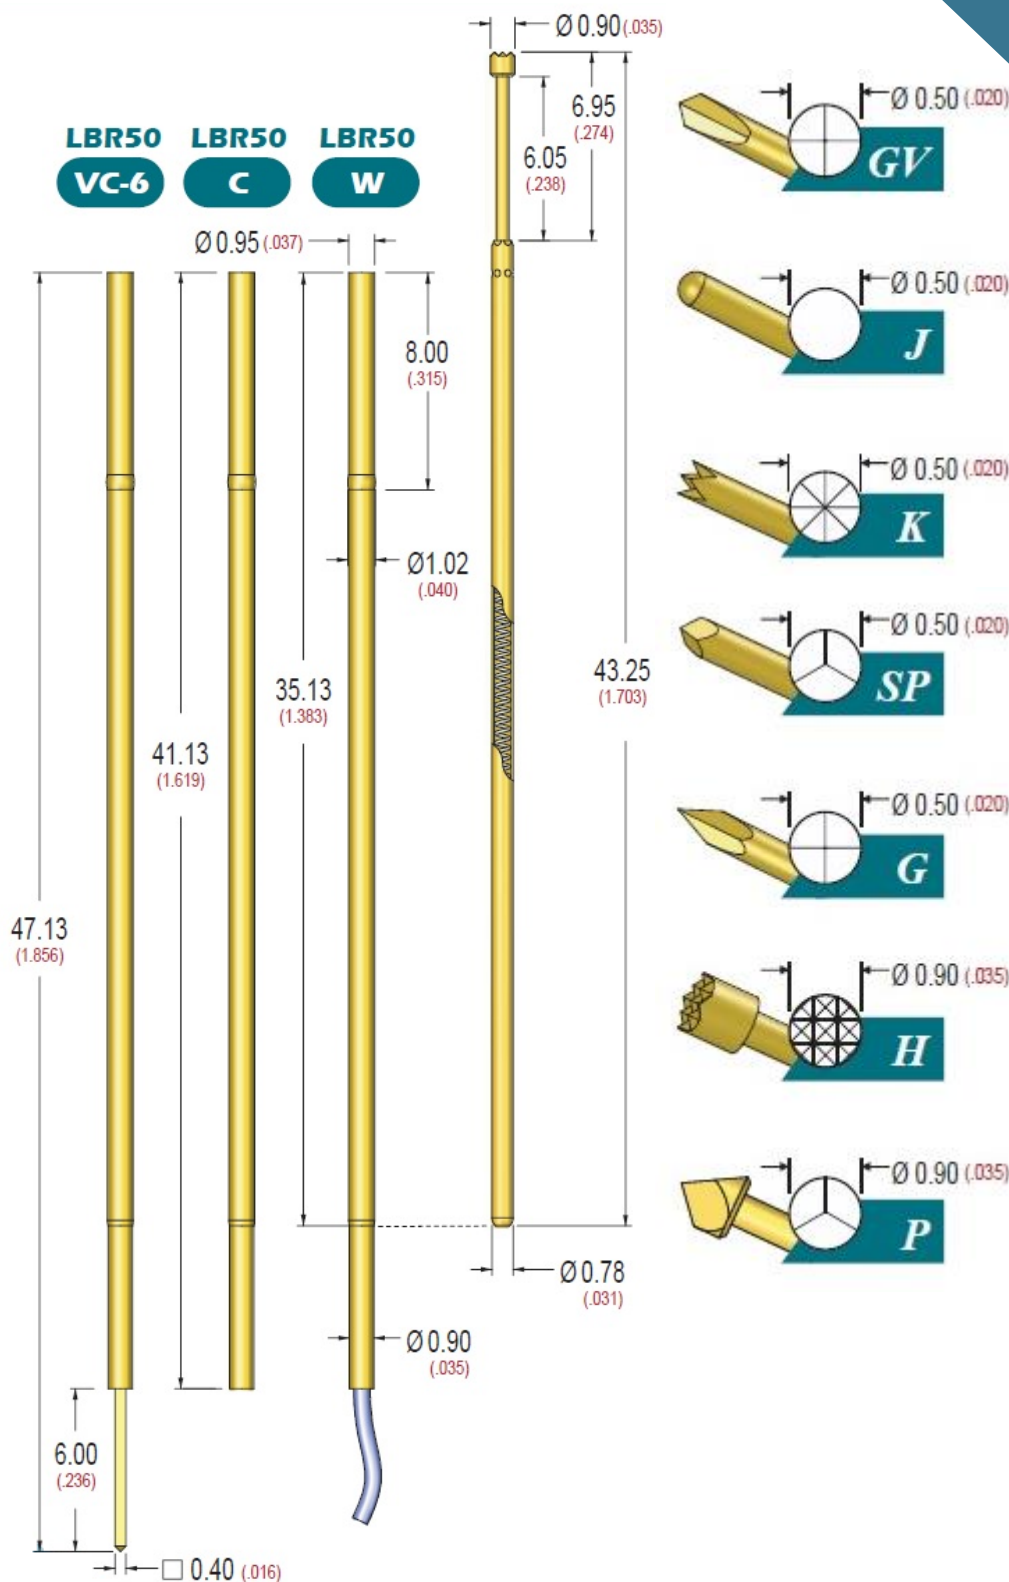

RECEPTACLE ORDER CODE

SERIES - SIZE - END STYLE - POST LENGTH
LBR-50-VC-6

PROBE ORDER CODE

SERIES - SIZE - TIP STYLE - TIP DIAMETER - SPRING FORCE
LB-50-H-0.9-S